

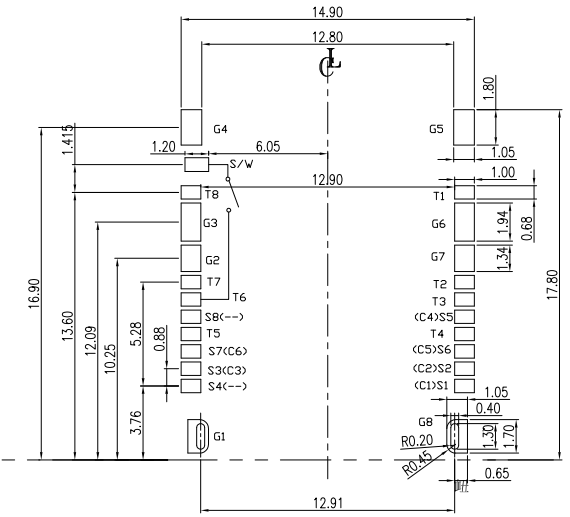


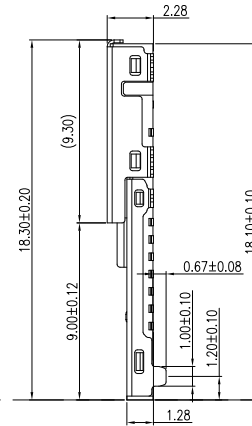

MICRO-SD CARD PIN ASSIGNMENT:

Pin Define	
T1	DAT2
T2	CD/DAT3
T3	CMD
T4	VDD
T5	CLK
T6	VSS(GND)
T7	DAT0
T8	DAT1
G1-G8	GND
S/W	CARD DETECTOR

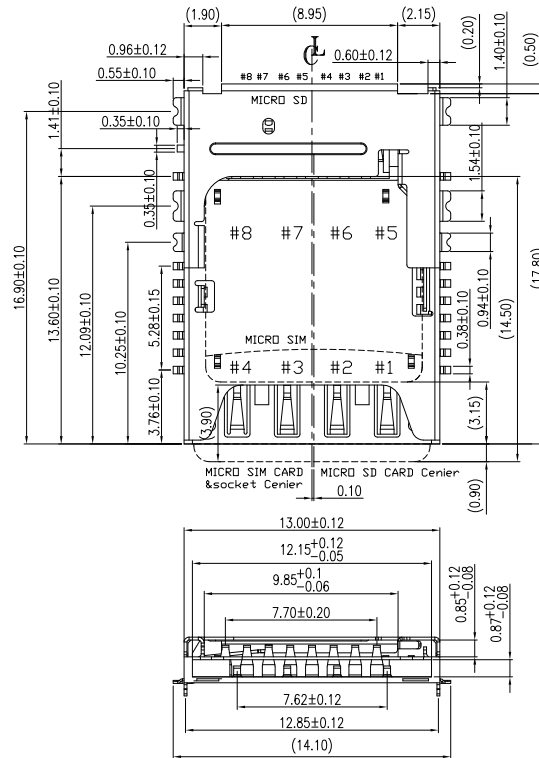

RECOMMENDED P.C.B LAYOUT
TOLERANCE:±0.05

NOTES:

1.MATERIAL:
HOUSING MATERIAL:THERMOPLASTIC UL94V-0;
CONTACT MATERIAL:COPPER ALLOY.
SHELL:STAINLESS STEEL.

2.FINISH:
CONTACT:Au PLAT CONTACT AREA,Au PLAT SOLDERING AREA;
SHELL:Au PLAT SOLDERING AND SWITH AREA.

MICRO-SIM CARD PIN ASSIGNMENT:

8P	6P	DEACRIPTION
S1	C1	VCC
S2	C2	RST
S3	C3	CLK
S4	--	Reserved
S5	C4	GND
S6	C5	Vpp
S7	C6	I/O
S8	--	Reserved



Title	COMBO TYPE MICRO SD + MICRO SIM TYPE		
<i>Tolerances</i>	<i>Drawer</i>	Naomi	<i>Part No:</i>
<i>Linear</i>	<i>Checked</i>	Summer	WCT-MKSIMTF-NOTE
X ±0.50 .X ±0.30 .XX ±0.25	<i>Approved</i>	Macus	<i>Cus. Part No:</i>
<i>Angles</i>	<i>Date</i>	2016.04.15	
± 3°	<i>Projection</i>	<i>Version</i>	<i>Size</i> A4 <i>Units</i> mm
		A	<i>Scale</i> 1:1 <i>Sheet</i> 1/1