



1.MATERIAL:

INSULATOR: Hi-TEMPERATURE PLASTIC,UL 94V-0,
 COLOR"BLACK
 TERMINAL: COPPER ALLOY,
 SHELL: STAINLESS STELL,




2.PLATING:

TERMINAL: SELECTIVE GOLD FLASH PLATING ON CONTACT AREA,
 AND 50u" min NICKEL UNDERPLATED ON ALLOVER,
 SHELL:50u" NICKEL UNDERPLATED ON ALLOVER,


3.SPECIFICATIONS

INSULATION RESISTANCE: 1000M min.AT DC 500V DC
 WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
 CONTACT RESISTANCE: 100mΩ max. AT 10mA/20mV max
 CURRENT RATING: 0.5A
 VOLTAGE RATING: 5.0 vrms
 OPERATING TEMP.RANGE:-40° C+70° C
 MATING CYCLES: 3000 INSERTIONS

4.PACKAGE: TAPE REEL, 1500PCS/REEL

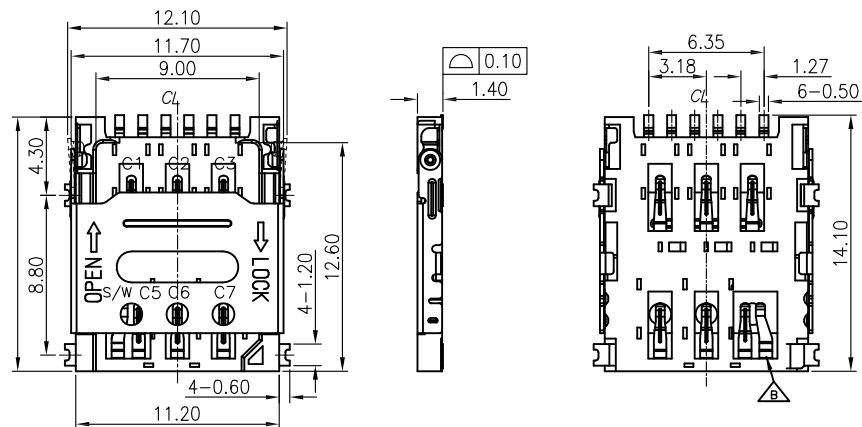


SIM CARD	
PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
S/W	Switch Pin

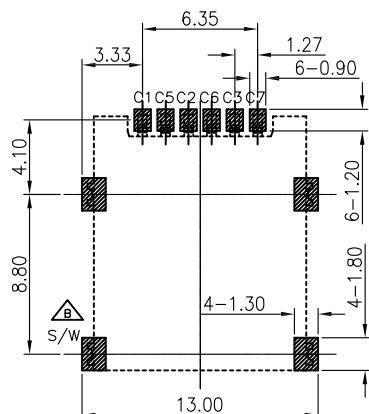


RECOMMENDED PCB LAYOUT
 TOLERANCE ±0.05


■ SMT SOLDER AREA



STEP 1 INSERT NANO SIM CARD



STEP 2 PUSH THE SHELL



STEP 3 FINISH



Title		nano sim hingel 1.40H type		
Tolerances	Drawer	Naomi	Part No:	
Linear	Checked	Summer	WCT-SIM-11162-II	
X ±0.15	Approved	Macus	Cus. Part No:	
.X ±0.05	Date	2017.04.01		
Angles	Projection	Version	Size	A4 Units mm
± 3°		A	Scale	1:1 Sheet 1/1